


COLOUR TEMP. (K)		LAMP (W)	VOLTAGE (V)
3200	FLOOD	800 1000	230 240
TUNGSTEN		HALOGEN PAR	

## Minibrute with 9 lamps 800 W /1000 W

This powerful multi-lamp luminaire is composed of nine open-face tungsten halogen lamps and it is an indispensable tool for lighting medium/large areas.

It provides an extremely bright, soft and even illumination and its high intensity output permits a minimum number of units for the required lighting level. Particularly suitable for use in film shooting, commercials, live shows and concerts.



### Main Features


- Robust steel construction
- Each bank swivels for beam control and can be blocked with its own brake
- One switch for each lamp
- Individual lamps rotate 360° to orient oval beam pattern to horizontal or vertical position
- Quick-lock power connector in standard configuration
- Customized electrical configurations available: one cable for each bank, 3-phase 400 V, Socapex
- Supplied with barndoors, single wire meshes, single accessory holders and cable
- **Designed and manufactured in ITALY**

### Ordering Codes

RC 900/80 - Minibrute with 9 lamps 800 W, with barndoor and safety mesh

RC 900/100 - Minibrute with 9 lamps 1000 W, with barndoor and safety mesh

- Steel construction
- High- temperature coating
- Sanded and treated aluminium reflectors
- Aluminium yoke mounting with 28 mm (1 1/8") spigot
- 5 m H07RNF cable with quick lock connector
- Lamp base R7s
- Supply voltage 230 – 240 V (380 V for the 3-phase configuration)
- Colour temperature 3200 K
- IP 20
- CE compliant
- Weight 15 kg

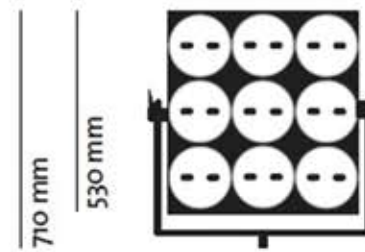

## Photometrics

### 800 W

Flood (90°)			
Distance (m)	3	5	7
Lux	7250	2900	1500

Typical performance based on DXX P2/13 800 W 230 V

### 1000 W

Flood (90°)			
Distance (m)	3	5	7
Lux	9250	3750	1900

Typical performance based on DXX P2/35 1000 W 230 V

## Lamps\*


### BASE R7s - 3200 K

CODE	WATT	ANSI	LIF
RC 80 	800-230 V	DXX	P2/13

OSR 64571 - OSRAM halogen lamp, DXX P2/13 800 W 230 V R7s  
 LSR 80093 - LASER halogen lamp, P2/13 800 W 230 V R7s (93 mm)  
 OSR 64572 - OSRAM halogen lamp, DXX P2/35 1000 W 230 V R7s  
 LSR 100 - LASER halogen lamp, P2/35 1000 W 230 V R7s

\*not included

### BASE R7s - 3200 K

CODE	WATT	ANSI	LIF
RC 100 	1000-230 V	-	P2/35
	800-230 V	-	P2/13

## Accessories



**RC 600/10**  
Two-leaf barndoor for Minibrute 6  
1500 g




**A1020CS**  
Chrome steel stand, 2 risers, 101/198 cm, 28/16 mm socket, 35 kg load



**RC 952**  
Single safety mesh  
40 g



**A1035B**  
Aluminium stand, 2 risers, 168/350 cm, 28/16 mm socket, black, 30 kg load



**RC 600/20**  
Gel frame 350 g



**087NW**  
Wind up steel chrome stand, 2 risers, 167/370 cm, 28-16 mm socket, 30 kg load



**RC 900/20**  
Neoprene HO-RNF 5 m supply cable  
3 x 10 mm<sup>2</sup> 3000 g

Technical specifications and data are provided for guidance only. Due to improvement in technology and/or in products, all product, specs and data are subject to change without notice. COSMOLIGHT accepts no liability for any errors, inaccuracies or incompleteness contained herein.