

FF3625	FF3624	FF3620	
on request	<mark>650</mark>	<mark>350</mark>	width: mm
	25 19/32	13 25/32	inch
NA	<mark>2,500</mark>	<mark>1,610</mark>	weight: kg
	5,510	3,548	lb
NA	<mark>0,0075</mark>	<mark>0,0040</mark>	volume: cu m
	0,2650	0,1413	cu ft
NA	<mark>2,600</mark>	<mark>1,800</mark>	weight: kg
	5,727	3,965	lb

50 x 50 1 31/32 x 1 31/32

2 29/32

74 2 29/32

3 15/16

7


8

Extensions in other lengths


(E) are available on request.

APPLICATIONS

go to index

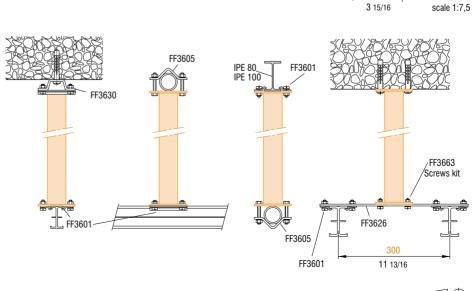

Metric measurements should be taken as reference. Imperial values have been calculated from metric and rounded to nearest 1/32 inch. EI D IMPORTANT: installation must be carried out by qualified personnel and in accordance with the safety regulations of the country/region of installation.





finish: grey powder coating with orange peel finish RAL 7016

max. load:

250 kg

551 lb

13/32

 \bigcirc

I