

TUNGSTEN FRESNEL

Technical features

Operational Data

Power consumption	1000 W
Supply voltage	120 - 240 V
Tilt adjustment	Pivot located at centre of gravity for excellent balance and positive locking
Tilt recommended angle of use	-90° / 0° / 90°
Focus Adjustment	Stainless steel, maintenance-free wire focus mechanism with a wire and pulley push/pull carriage travel system Side mounted pole operated focus mechanism
Accessory Fitting	Spring loaded top hinged bracket Lower accessory support bracket fitted with barndoor safety catch (extra safety)
Barndoor diameter	200 mm
Colour frame/ scrim diameter	202 mm
Filter cut size diameter	195 mm
Lamp holder	G22
Safety mesh	Stainless steel safety mesh 25x25 mm
IP rating	IP 20
Max operating ambient temperature	45°

Optical Data

Lens	Fresnel 130 mm Ø, low expansion borosilicate Fresnel lens on spring Teflon support
Reflector	Spherical specular reflector in bimetallic aluminium (99.99/99.95 %) with special anodised coating for high-efficiency finish
Beam Angle	13° to 49.3°

Mechanical Data

Finish	High-quality epoxy powder coating Special extra high-temperature treatment in critical areas External textured low gloss finish
MO mounting	Manual U-shaped stirrup with lateral thrust bearing and lock off knob for quick and secure locking, 28 mm (1 1/8") spigot
PO mounting	Pole op. U-shaped stirrup, pan & tilt clutch gear mechanism for manual override, 28 mm (1 1/8") spigot

Electrical

MO version	On/Off head mounted toggle switch 8A / 250V, 5m bare ended cable, 3x1.5 mm ² section cable Plugs and cables upon request
PO version	On/Off head mounted toggle switch 8A / 250V, 5m bare ended cable, 3x1.5 mm ² section cable Plugs and cables upon request

Dimension

Weight (head stirrup)	5.7 kg manual version 7.0 kg pole op. version
Packed volume	510 mm x 410 mm x 495 mm

Technical specifications and data are provided for guidance only. Due to improvement in technology and/or in products, all product, specs and data are subject to change without notice. COSMOLIGHT accepts no liability for any errors, inaccuracies or incompleteness contained herein.

TUNGSTEN FRESNEL

Specifications

Photometrics


Spott (13°)

Throw (m)	3	5	10	15
Lux	9,122	3,284	821	365
Beam ϕ (m)	0.7	1.1	2.3	3.4

Flood (49.3°)

Throw (m)	3	5	10	15
Lux	2,389	860	215	95
Beam ϕ (m)	2.7	4.6	9.2	13.7

Typical performance based on CP40 1000W

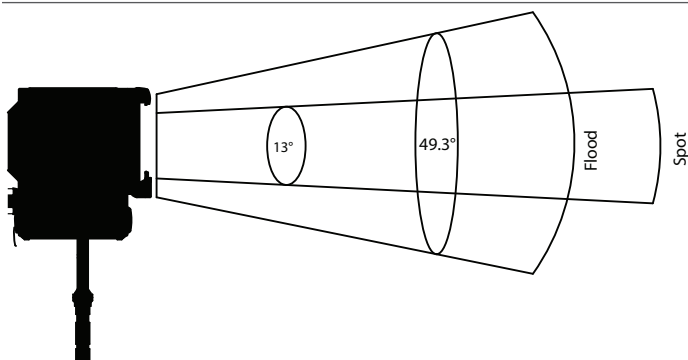

Lamp Data

Lamp code	CP40/CP71 1000W 240V
Base	G22
Lumens	26,000
Correlated colour temperature	3200K

Ordering Codes

27640 - Bambino Fresnel 1kW MO Mk2 120/240V supplied with manual stirrup, colour frame, four-leaf rotating barndoor

27642 - Bambino Fresnel 1kW PO Mk2 120/240V supplied with pole operated stirrup, colour frame, four-leaf rotating barndoor

Technical specifications and data are provided for guidance only. Due to improvement in technology and/or in products, all product, specs and data are subject to change without notice. COSMOLIGHT accepts no liability for any errors, inaccuracies or incompleteness contained herein.