


COLOUR TEMP. (K)		LAMP (W)	VOLTAGE (V)
3200	FLOOD	500	230 240
TUNGSTEN		HALOGEN	AVAILABLE

## Pinza Photoflood 500 W

This small Minipinza is a 500 W floodlight, open-face, tungsten floodlight.

It provides extremely soft, wide and even illumination particularly suitable for photographic sets and architectural applications.



### Main Features


- Very strong and lightweight aluminium housing
- Inner housing silver painted to provide a high degree of reflectivity
- Silicone cable for high flexibility and to avoid fire risk
- Top quality switch with very high number of on/off cycles
- Indestructible flexible arm for great versatility and ease of installation
- For architectural applications, it is possible to use long lamp life E27 type
- **Designed and manufactured in ITALY**

### Ordering Codes

RC 50 - Pinza 500 W clamplight photoflood

RC 50B - Pinza 500 W clamplight photoflood black

- Aluminium housing
- High-temperature coating
- Inner silver painting
- Clamp and flexible arm mounting
- 3.5 m VDE fire resistant silicone cable, 3 x 1.5 mm<sup>2</sup> section
- In-line 10 A switch protected by high-impact-proof housing
- High-impact-proof lamp socket housing
- Supply voltage 230 – 240 V
- Lamp base E27 screw type
- Colour temperature 3200 K
- IP 20
- CE compliant
- Weight 0.9 kg
- Packing dimensions 270 mm x 210 mm x 170 mm

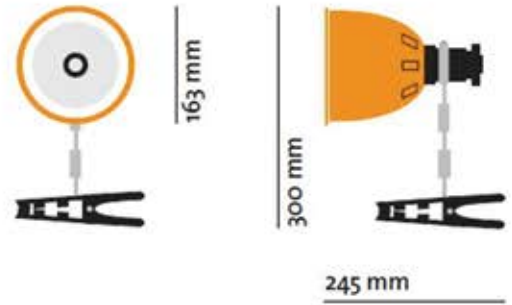

## Lamps\*

BASE E27 - 3200 K

CODE	WATT	ANSI	LIF
RC 50	500-230 V	-	-



PH PF318 - DR. FISHER incandescent lamp, 500 W 220 V E27  
\*not included

## Accessories



**RC 103C/R**  
Four-leaf barndoor with safety mesh and gel filter clips 650 g



**RC 105A**  
Diffusion glass 170 g



**RC 50/63**  
Snoot Ø 63 mm 210 g (with RC 101 use only)



**RC 212B**  
Aluminium stand, 3 risers, 90/280 cm, 16 mm spigot, black, 5 kg load



**RC 101**  
Accessory holder 350 g



**RC 106**  
Scrim set (4 pieces) 150 g



**RC 3200**  
Bar supporting clamps 50 cm 550 g



**RC 104**  
Dichroic filter 170 g



**RC 107**  
Safety mesh (excludes any other accessory) 110 g



**FF3870**  
Safety Steel cable 2.5 mm Ø - 70 cm length



**RC 105**  
Safety glass 170 g



**RC 50/55**  
Snoot Ø 55 mm 200 g (with RC 101 use only)



**RC 211B**  
Aluminium stand, 3 risers, 78/240 cm, 16 mm spigot, black, 5 kg load

Technical specifications and data are provided for guidance only. Due to improvement in technology and/or in products, all product, specs and data are subject to change without notice. COSMOLIGHT accepts no liability for any errors, inaccuracies or incompleteness contained herein.