

## FF3541



### Detachable carriage with brake

One side of the carriage can be removed to attach or detach the carriage to/from the IFF Rail 80. Spring-loaded brake pad holds carriage in position. To release the brake pull down on wire with operating pole. Spring pantographs FF3512 and FF3514 can be mounted directly onto the carriage without additional male/female connections between carriage and pantograph. This very compact design offers a great advantage for studios with low ceilings.



material: body: steel



finish: grey powder coating with "orange peel" finish RAL 7016



weight: 1,90 kg  
4,19 lb




volume: 0,0030 cu m  
0,1060 cu ft



max. load: 90 kg  
198 lb





weight: 2,03 kg  
4,47 lb

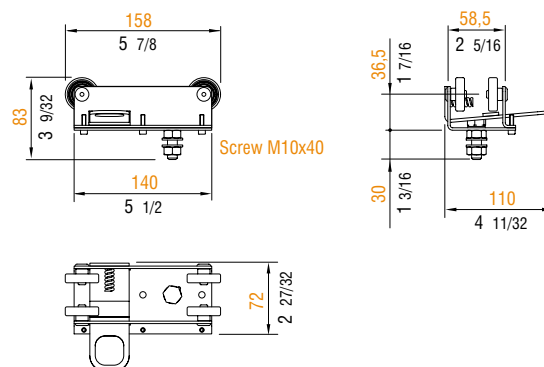


scale 1:7,5

### APPLICATIONS

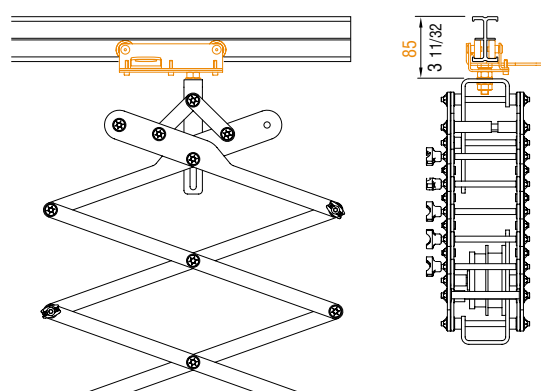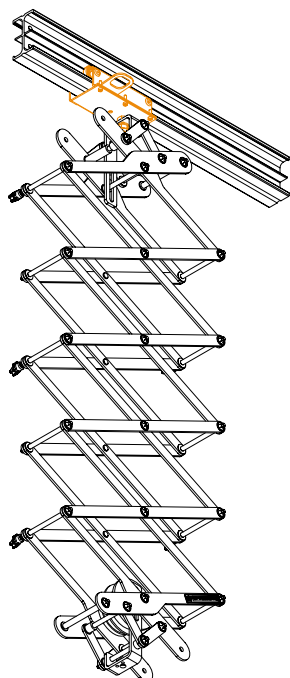

scale 1:10

ASSEMBLY  
SEQUENCE

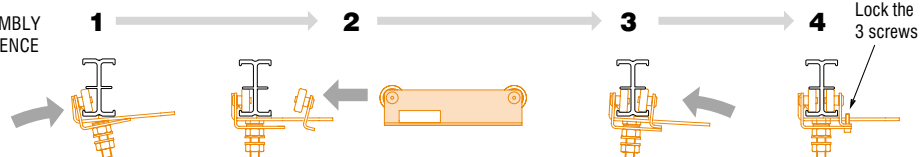

Metric measurements should be taken as reference. Imperial values have been calculated from metric and rounded to nearest 1/32 inch. **IMPORTANT:** installation must be carried out by qualified personnel and in accordance with the safety regulations of the country/region of installation.