

# DUO P.O. PANTOGRAPH -




## DROP FROM 3M TO 6M MAX LOAD 40KG



**IFF Pole Operated Pantograph suspends and positions luminaires with loads of up to 40kg. It is a stable and versatile suspension unit for medium and large studios.**

This manual pantograph incorporates a twin wire rope system for raising and lowering the luminaire with a double scissors mechanism to provide stability and support the luminaire cable. The pantograph is dynamically and statically irreversible thanks to its static and dynamic efficiency (<0.5). The pantograph is manufactured in accordance with the DIN 15560-46.

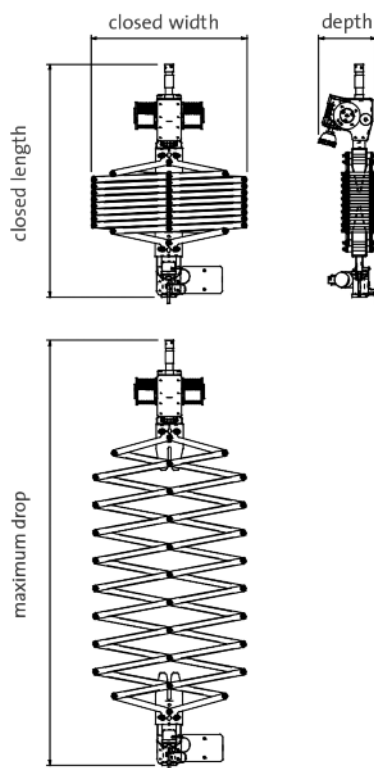

### PART NUMBER

	FF3808Y30	FF3808Y40	FF3808Y50	FF3808Y60
WITH BUSHING 28MM	FF3808Y30	FF3808Y40	FF3808Y50	FF3808Y60
WITH UNIVERSAL HEAD	FF3808Y31	FF3808Y41	FF3808Y51	FF3808Y61
Maximum load	40kg	40kg	40kg	40kg
Maximum drop	3m	4m	5m	6m
Closed height	0.66m	0.70m	0.74m	0.78m
Closed width	0.52m	0.52m	0.52m	0.52m
Self weight	14,2kg	15,5kg	16,8kg	18,1kg
Height adjustment	local pole operated	local pole operated	local pole operated	local pole operated
Lifting rope	Ø 2mm x 2pcs	Ø 2mm x 2pcs	Ø 2mm x 2pcs	Ø 2mm x 2pcs
Top fixing	28mm (1 1/8") male spigot	28mm (1 1/8") male spigot	28mm (1 1/8") male spigot	28mm (1 1/8") male spigot
Bottom fixing with bushing 28mm	28mm (1 1/8") female socket	28mm (1 1/8") female socket	28mm (1 1/8") female socket	28mm (1 1/8") female socket
Bottom fixing with universal head	28F - 16M/F	28F - 16M/F	28F - 16M/F	28F - 16M/F

On request: Electric cable and socket for luminaire