


COMBI HOIST



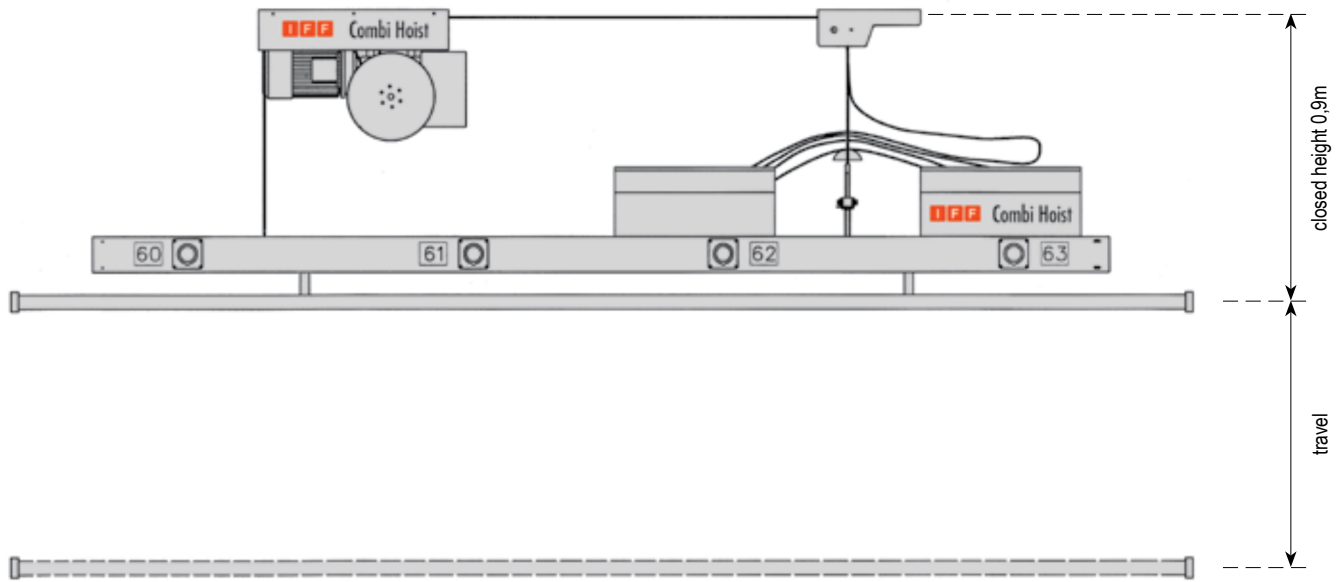

MAX DROP UP TO 14M STANDARD MAX LOAD UP TO 200KG

The Combi Hoist combines a simple design with the highest standards of construction and ease of installation for payloads up to 250kg.

The versatile Combi Hoist offers 2 key advantages; the lighting batten or rail can be customized between 2 to 7 meters in length and the ceiling mounting points can be adjusted to fit the studio structure. This versatility along with the price performance ratio for the hoist makes it a most valuable performer.

The Combi Hoist employs one motor with dual cable lifting drums and two diverter pulleys. The hoist has 4 wire rope lifting cables and complies with the European safety regulations DIN 15560-46

TECHNICAL FEATURES STANDARD VERSION

FF3907

Attachment for lights	suitable for 2m-7m IFF rail or Ø48mm pipe
Gear motor	total gear ratio 100:1 angle of slope 3° 06' 1.5kw three-phase max torque 450Nm permanent lubrication
Lifting rope	4x4mm diam 1200 kg breaking load/each
Lifting speed (average)	100mm/s - 135mm/s
Safety switches	1+1 adjustable for max and min position 1+1 for limit, 4 for slack wire (one for each rope) 2 for overload (1 for each balancer)
Electrical motor feed	cable for motor + control 4x2.5sqmm + 2x1sqmm
Electrical luminaires feed	flat cable with size according to the sockets
Outlet options	32A IEC309, 16A IEC309, Schuko, DMX, Audio, Video or other on request
Terminal box	fitted and with connecting terminals

All product for reference and may change without notice

