


MONO PANTOGRAPH



DROP FROM 3M TO 6M MAX LOAD 40KG

IFF Pole Operated Pantograph suspends and positions luminaries with loads of up to 40 kg. It is versatile suspension unit for small, medium, and large studios.

The pantograph can be extended via twin wire ropes. A specially designed sheet metal scissors mechanism adds stability and supports the luminaire power cable. It is dynamically and statically irreversible thanks to its static and dynamic efficiency (<0.5). The pantograph is manufactured in accordance with the DIN 15560-46.

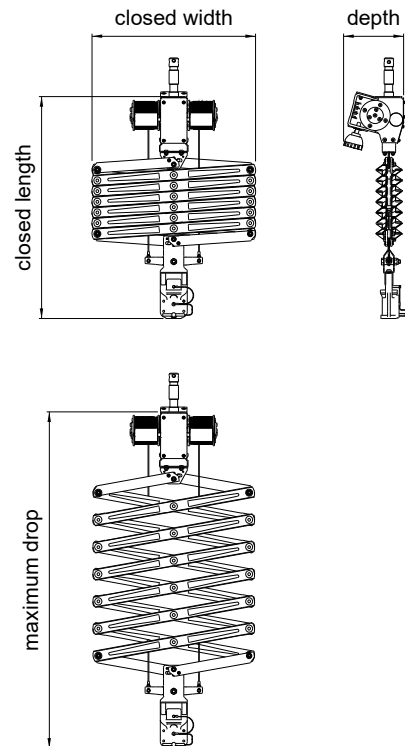

PART NUMBER

	FF3800Y30	FF3800Y40	FF3800Y50	FF3800Y60
WITH BUSHING 28MM	FF3800Y30	FF3800Y40	FF3800Y50	FF3800Y60
WITH UNIVERSAL HEAD	FF3800Y31	FF3800Y41	FF3800Y51	FF3800Y61
Maximum load	40kg	40kg	40kg	40kg
Maximum drop	3m	4m	5m	6m
Closed height	0.78m	0.85m	0.92m	0.99m
Closed width	0.48m	0.48m	0.48m	0.48m
Self weight	15.1kg	16.4kg	17.7kg	19kg
Height adjustment	Local pole operated	Local pole operated	Local pole operated	Local pole operated
Lifting rope	Ø 2mm x 2 pcs	Ø 2mm x 2 pcs	Ø 2mm x 2 pcs	Ø 2mm x 2 pcs
Top fixing	28mm (1 1/8") male spigot	28mm (1 1/8") male spigot	28mm (1 1/8") male spigot	28mm (1 1/8") male spigot
Bottom fixing with bushing 28mm	28mm (1 1/8") female socket	28mm (1 1/8") female socket	28mm (1 1/8") female socket	28mm (1 1/8") female socket
Bottom fixing with universal head	28F - 16M/F	28F - 16M/F	28F - 16M/F	28F - 16M/F